

## Metal Roof Sealant




### Adheres To

- Lap Joints
- Pipe Boots
- Trim
- Copper\*
- Metal Siding
- Metal Roof
- PVC
- Snow Guards
- Single-Ply
- Gutters
- Aluminum
- Stucco
- Roof Flashing
- Downspouts
- Roof Tile
- Termination Bars

### Product Advantages

- Adheres to Kynar® coated metals\*\*
- Excellent adhesion and flexibility
- VOC Compliant
- Mildew Resistant
- Application Temperature -20°F to +120°F
- Freeze thaw stable
- Service Temperature -40° F to +400° F
- Invisible to UV light
- Tack free in 10 minutes
- Completely cured in up to 2 days

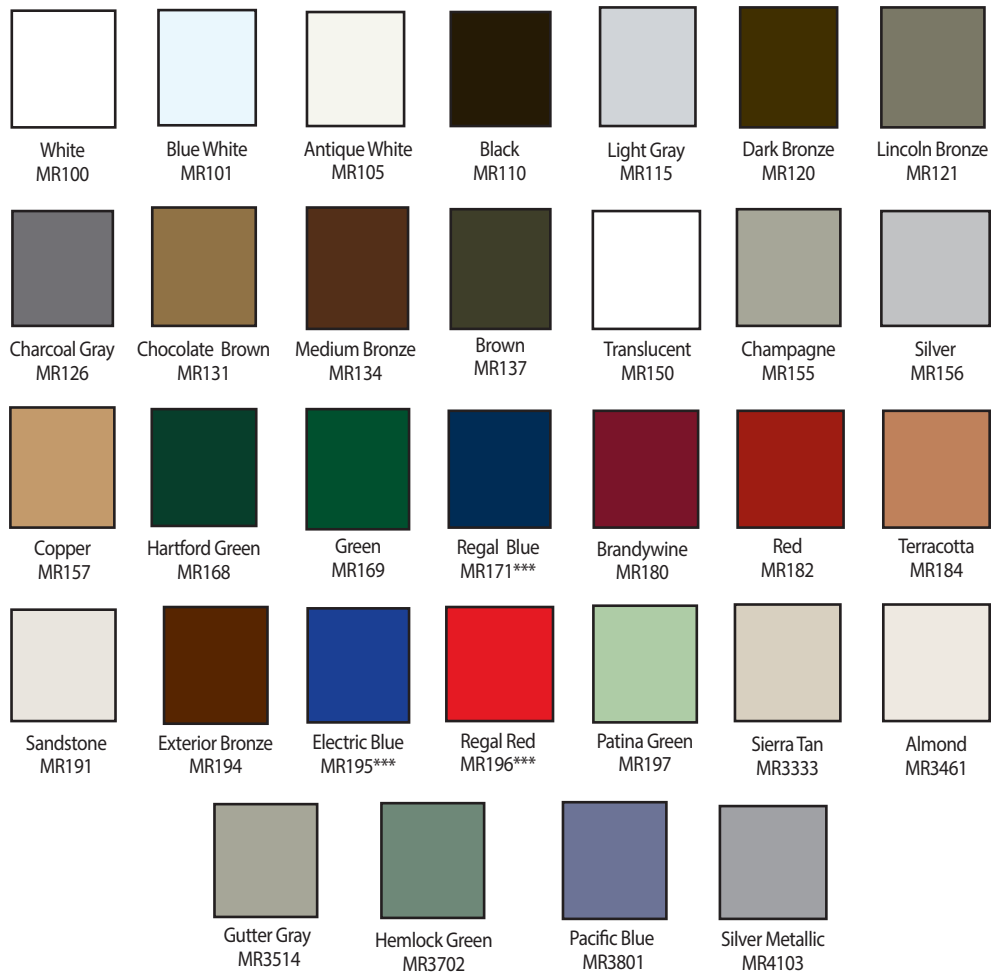

\* In exposed areas only

\*\* Kynar is a registered trademark of Arkema Inc

\*\*\* Bright Color Pricing

## Metal Roof Sealant

### Technical Information

Product: Novaflex  
Metal Roof Sealant

Appearance: Smooth paste

Service Temperature:  
-40°F to +400°F

Adhesion: Excellent to most  
common building materials

Consistency: Non-sag

Gunning Extrusion: Easy to gun

Flexibility: Good

Water Resistance: Good  
– Not to be submerged

Exterior Weathering: Excellent

Aging: Excellent

Freeze-Thaw Stable: Will not freeze

Odor: None

Skin Time:

- 40°F/40% relative humidity – 40 minutes
- 75°F/50% relative humidity – 10 minutes
- 95°F/95% relative humidity – 5 minutes

Through Time:

- 40°F/60% relative humidity – 2-3 days
- 75°F/50% relative humidity – < 24 hrs

Weight per gallon: 10.2 pounds

Solids: 97%

Novaflex<sup>®</sup> Metal Roof Sealant provides unbeatable adhesion to metal, coated metals, wood, masonry, PVC and most common construction materials.

### Product Specs

Coverage: 1/4" bead application - 28 linear feet

Specifications: Meets or exceeds ASTM C-920, TT-S-001543A and TT-S-230C

Shelf life: Use product within 18 months from manufacturer's date. FREEZE THAW STABLE.

User Tips: Not designed for continuous submersion or use below the waterline.

Clean Up: Clean tools with toluene or mineral spirits before it dries. After setting, excess sealant must be cut or scraped away. Follow solvents vendor's precautions.

### Not Recommended For

- Surface temperature below 0°F or exceeding 120°F during installation
- Surfaces continuously immersed in water
- Building materials that bleed oils, plasticizers or solvents that may affect adhesion
- Frost-laden or wet surfaces
- Completely confined joints or if the sealant is intended to be painted

Limited Warranty: Satisfaction guaranteed when handled and applied according to label instructions. Call 1-800-380-0138 for Customer Service.

**CAUTION!:** Avoid contact with eyes and skin. Wash hands after using.

### KEEP OUT OF REACH OF CHILDREN

First Aid: In case of eye contact, flush thoroughly with large amounts of water. Get medical attention if irritation persists. If swallowed, call Poison Control Center, hospital emergency room, or physician immediately.

WARNING: Eye and skin irritant! Do not swallow. Do not allow eye contact or prolonged skin contact.

SEEK IMMEDIATE MEDICAL ATTENTION. Additional information please refer to MSDS.

Disposal: For disposal of material follow federal, state and local regulations.

### Product Information

- Description - Metal Roof Sealant
- Item Number - 02-MR0XXX0-10C1
- Size - 10.3 FL. OZ (304 mL)
- Unit Dimensions - 9" x 2" x 2"

Also available in sausage packages:

Item Number - 02-MX0XXXX-20S1

Size - 20 FL Oz

Dimensions - 12 3/4" x 2" (unit)

13 1/2" x 8 1/4" x 6" (case)

### Case Pack Information

- Description - Metal Roof Sealant
- Item Number - 02-MR0XXX0-10C1
- Dimensions - 11 15/16" x 9 15/16" x 8 1/8"
- Case Weight 10 lbs. / Cases Per Pallet -120

**NOVAGARD**  
Solutions.  
Engineered Products... Innovative Thinking

5109 Hamilton Ave.  
Cleveland, OH 44114  
1-800-380-0138  
www.novagardsolutions.com  
Made in USA. For commercial use.

